



TECHNICAL SHEET



FA 20 500 02

Designation : Retractable Fall Arrester Olympe in webbing


- Webbing width : 25 mm
- Casing made up of aluminium alloy
- Minimum breaking strength : > 15 kN

To be used wherever the user needs a greater freedom of movement and needs to pass obstacles while remaining in safety permanently.

Connectors :

2 steel scaffold hooks, opening 55 mm, ref. FA5020755

Compliance : Conforms to EN 360:2002

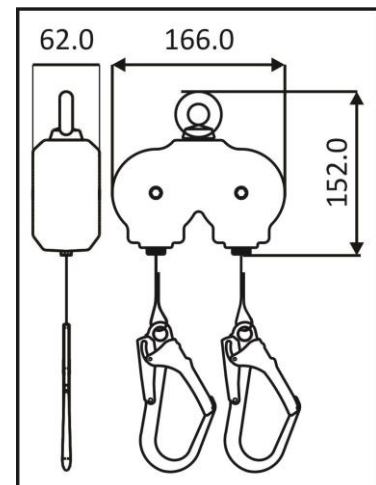

Length : 2 m

Material of the components :

Casing : Aluminium Alloy

Webbing : Polyester

Connectors : Steel

HS code

84289090

Carton Size / Pieces

60x50x26 / 10

Unit Weight

2,80 kg

AET: N°5929 Issue 1 Extension 1

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



Maj. : 03/15

ZI les portes du Dauphiné

4 rue de l'Aigue

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

